

Fiber Laser Mirror Gratings

High Reflectors and Output Couplers for Fiber Lasers

ITF Technologies' FBG Mirrors are built upon our years of experience in Fiber Bragg Grating manufacturing to provide reflectors written in the core of optical fibers. Our new technology feature an even lower heating rate to address the continually rising power demands in industrial fiber laser applications.

FBG Mirrors from ITF Technologies are suitable for pulsed and high power CW laser cavities. They can be manufactured in Single Mode fibers or Large Mode Area (LMA) fibers. Our manufacturing process ensures the best fundamental mode transmission to maintain beam quality. They are offered in our high power package or with recoat-only.



KEY FEATURES

- Ultra-precise Wavelength Matching
- Wide Bandwidth & Reflectivity Range
- Wide Variety of Fiber Types
- High Power Handling
- ROHS Compliant

APPLICATIONS

- Fiber Lasers
- Industrial, Telecom & Research

FOR MORE INFO

Please contact us at:
North America: **514.748.4848**
888.922.1044
Europe: **+33 (0) 1 69 80 57 50**
Asia: **+86 755 2671 0449**
or via e-mail at: **info@itftechnologies**


Fiber Laser Mirror Gratings

HIGH REFLECTORS AND OUTPUT COUPLERS FOR FIBER LASERS

1 um Fiber Laser Gratings

Wavelength (1)	1018 to 1120 nm		
Single Mode (LP01) Reflectivity	10% (OC) - 99.5% (HR)		
Bandwidth (FWHM)	0.1 nm to 4+ nm		
Wavelength Matching, HR-OC	± 0.2 nm		
Fiber Type (2), (3), (4)	125 um	250 um	400+ um
Power Handling - (5), (6)	< 300 W	1500 W	up to 3000 W
Package Dimensions - (7)	60.0 x 12.0 x 6.5 mm		
Side Lobe Suppression Ratio	> 15 dB or better, as required		

Typical spectrum

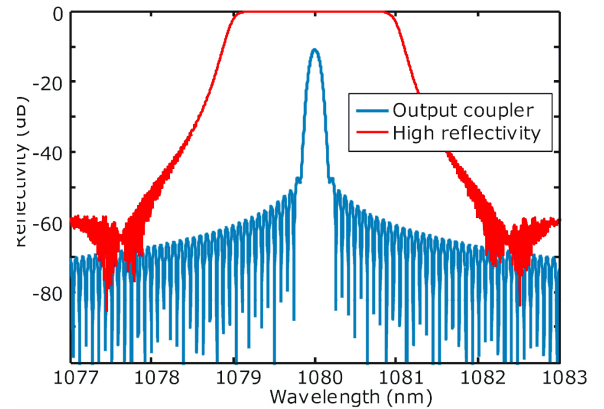

2 um Fiber Laser Gratings

Wavelength (1)	1940 to 2050 nm		
Single Mode (LP01) Reflectivity	10% (OC) - 99.5% (HR)		
Bandwidth (FWHM)	0.1 nm to 4+ nm		
Wavelength Matching, HR-OC	± 0.2 nm		
Fiber Type (2), (3), (4)	125 um	250 um	400+ um
Signal Power Handling - (5), (6)	30 W	30 W	> 50 W
Package Dimensions - (7)	60.0 x 12.0 x 6.5 mm		
Side Lobe Suppression Ratio	> 15 dB or better, as required		

NOTES:

- (1) Other wavelengths available around 1.5 um and 2.0 um
- (2) Fluorine free core
- (3) Single clad, double clad, or triple clad fibers
- (4) Some fibers are available in PM versions
- (5) Cladding Light, 915 nm, CW
- (6) Several grades are available, contact us for details
- (7) Recoated gratings also available

Typical power handling presented
Custom designs and prototypes also available

ORDERING INFO

ITF Technologies inc.
400 Montpellier Blvd., Montreal, QC H4N 2G7
Tel: +1 514 748 4848
Fax: +1 514 744 2080
Toll Free: +1 888 922 1044
www.itftechnologies.com
info@itftechnologies.com